




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>H01Q 13/20, 19/08, 13/08</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 95/32529</b> <b>(43) International Publication Date:</b> 30 November 1995 (30.11.95)
<b>(21) International Application Number:</b> PCT/GB95/01127 <b>(22) International Filing Date:</b> 18 May 1995 (18.05.95) <b>(30) Priority Data:</b> 9410274.6      20 May 1994 (20.05.94)      GB <b>(71) Applicant (for all designated States except US):</b> THE SECRETARY OF STATE FOR DEFENCE [GB/GB]; Defence Evaluation and Research Agency, Farnborough, Hampshire GU14 6TD (GB). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> BROOKER, Clive, John [GB/GB]; Intellectual Property Dept., R69 Building, Defence Evaluation & Research Agency, DRA Farnborough, Hampshire GU14 6TD (GB). SMITH, Paul, Denis [AU/GB]; Intellectual Property Dept., R69 Building, Defence Evaluation & Research Agency, DRA Farnborough, Hampshire GU14 6TD (GB). <b>(74) Agents:</b> BECKHAM, Robert, William et al.; Intellectual Property Dept., R69 Building, Defence Evaluation and Research Agency, Farnborough, Hampshire GU14 6TD (GB).		<b>(81) Designated States:</b> CA, GB, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>

(54) Title: ULTRAWIDEBAND ANTENNA

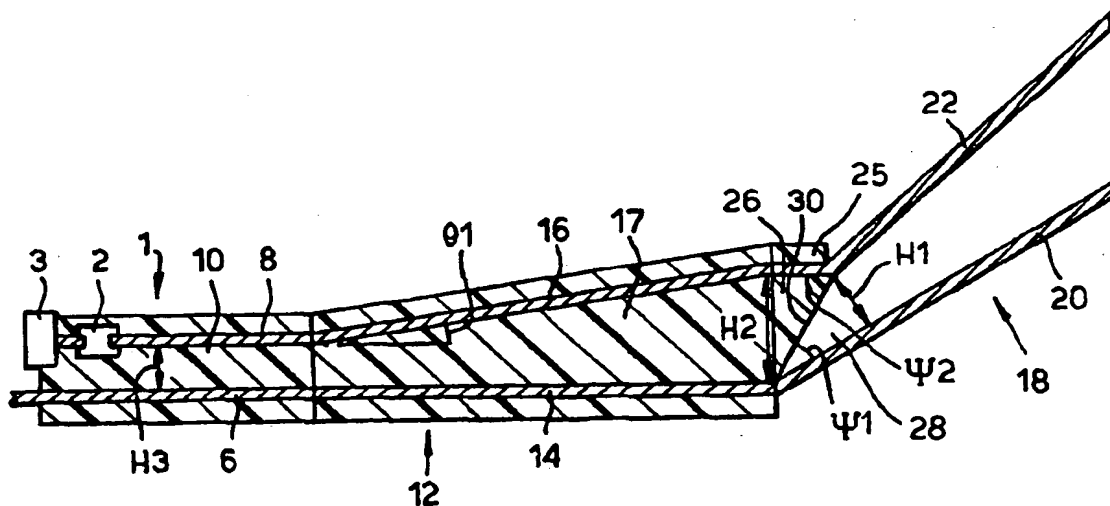

## (57) Abstract

An ultrawideband transverse electromagnetic mode horn antenna for use at high voltages, comprises a pulse generator (1) and two transmission horns (12, 18) containing different dielectric media. The interface (30) between the dielectric media is configured so that a signal from the generator is incident on the interface at an angle substantially equal to the Brewster angle, thereby maintaining a good impedance match across the interface. A further advantage of the arrangement is that the TEM wavefront is preserved through the antenna section allowing operation at fast pulse risetime (less than 200ps) for short duration (several ns) at high voltage.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## ULTRA WIDEBAND ANTENNA

5           The invention relates to an ultrawideband antenna incorporating a pulse generator for use in transverse electromagnetic mode (TEM), particularly for use at high voltages.

10           There is a desire to develop antennae capable of operating with pulses of increasingly high voltage, short duration and rapid pulse risetime and repetition rate, for example for application in wide bandwidth high definition radar systems. The transmission line geometry of such an antenna required to ensure good transmission of pulse energy is a principal area of concern, having associated problems which are exacerbated under higher voltage and rapid pulse risetime conditions.

15           In these antennae, the dielectric medium which contains the generator and the dielectric medium from which the signal is radiated away from the antenna are likely to be different, the former for example a dielectric polymer or transformer oil and the latter for example air or other suitable gas. Problems are encountered where the pulse  
20           signal output from the generator makes the transition between the dielectric media. To minimize degradation of the signal by reflection at an interface it is desirable to minimize impedance variation across it. The two media will possess different dielectric properties however, so that a transmission line having a continuous geometry at the interface will necessarily produce impedance discontinuities, so that  
25           reflection will occur. Impedance matching for a normally incident signal can be achieved by incorporating geometric discontinuities at the interface but this can also be expected to produce degradation of pulse quality. A further important consideration in determining geometry arises from the need to maintain an insulating condition in the transmission line to avoid breakdown. Voltage holdoff may reach

30kV/cm in air at atmospheric pressure which will determine the minimum plate separation for an air filled transmission line at a given voltage. These factors place limits on the voltage or necessitate use of a pulse having a longer risetime.

- 5           The present invention aims to provide an antenna which offers good impedance matching at the interface of the two dielectric media so as to preserve a rapid risetime at high voltage operation.

- 10           Thus according to the present invention there is provided an antenna comprising an electromagnetic pulse generator, a first transverse electromagnetic mode transmission line containing a first dielectric medium, and a second transverse electromagnetic mode transmission line containing a second dielectric medium, serially connected so as to enable transmission of a signal from the generator to the second transmission line, wherein the first transmission line incorporates a transition  
15           element providing an interface between the first and second dielectric media which is so configured that a signal from the generator is incident on the interface at an angle substantially equal to the Brewster Angle.

- 20           It will be appreciated that for a given pair of homogeneous dielectric materials the Brewster Angle represents the angle at which a plane wave incident on a planar dielectric interface with the magnetic field in a direction parallel to the plane of the interface will undergo no reflection. For a wave passing from medium 2 of higher refractive index and permittivity  $\epsilon_2$  to medium 1 of lower refractive index and permittivity  $\epsilon_1$  the angles  $\Psi_1$  and  $\Psi_2$  are given by

25                            $\tan \Psi_2 = \sqrt{(\epsilon_2/\epsilon_1)}$    and    $\tan \Psi_1 = \sqrt{(\epsilon_1/\epsilon_2)}$   
                           $\Psi_1 + \Psi_2 = \pi/2.$

For a polymethylmethacrylate to air transition, for example, these angles are  $\Psi_2 = 58.7^\circ$  and  $\Psi_1 = 31.3^\circ$ . In order to use this principle to match the impedances of two TEM horns which are located on either side of the media interface and meet along it

consider firstly two striplines in media 1 and 2 of heights H1 and H2 of equal width W. Then

$$\frac{H1}{H2} = \frac{\sin\Psi1}{\sin\Psi2} = \tan\Psi1 = \sqrt{(\epsilon1/\epsilon2)}$$

- 5 This implies that the impedance of the striplines (given approximately by  $Z_o (H1/W)$  and  $Z_o \sqrt{(\epsilon1/\epsilon2)} (H2/W)$  when  $H1, H2 \ll W$ ) are matched across the interface (ignoring any effects arising from the finite width of the stripline). The striplines can be replaced by TEM horn elements provided their elevation and taper is shallow to ensure that the wavefront arriving at the interface is nearly planar; small deviations
- 10 from exact planarity will produce small reflections.

- Use of the Brewster Angle concept in this way provides a method of configuring the dielectric transition which maintains a good impedance match across the transition. At the same time geometric discontinuities at the interface which
- 15 inevitably arise with impedance matching for normal incidence are reduced. The TEM wavefront structure is preserved through the antenna section and allows operation at fast pulse risetime (less than 200ps) for short duration (several ns) at high voltage.

- 20 The second dielectric medium is often conveniently gaseous. For many applications it is usefully the same as the medium into which the antenna is to be used to broadcast a signal, and hence for most operations the second dielectric medium is conveniently air. However, for some applications it is desirable to use as the second dielectric medium a gaseous dielectric with a higher breakdown potential than air, to
- 25 allow operation at higher voltage at a given geometry. A range of such gases, for example  $\text{SF}_6$ , can be considered for this purpose.

The interface between the first dielectric medium and the second dielectric medium must be accurately configured, and this is conveniently achieved when the

first dielectric medium possesses reasonable rigidity and machinability. Polymeric materials such as polymethylmethacrylate (PMMA), polystyrene, polytetrafluoroethylene (PTFE) and the like are suitable for this purpose. Alternatively, the first dielectric medium may comprise a liquid dielectric such as transformer oil in combination with an interface element of rigid material and substantially similar dielectric constant to the liquid to constrain the liquid and provide an accurate interface.

The invention is particularly appropriate to operation with pulses at high voltage and rapid risetime. The electromagnetic pulse generator is therefore preferably capable in use of generating a pulse at a voltage greater than 30kV, more preferably greater than 60kV, most preferably greater than 100kV, and is preferably capable in use of generating a pulse having a risetime of less than 200ps, more preferably less than 120ps. The pulses are also preferably of short duration (of the order of a few nanoseconds). To achieve signals within these parameters, the electromagnetic pulse generator preferably includes signal sharpening means such as a spark gap or ferrite sharpening lines.

The first and second transmission lines may in a simple embodiment each comprise parallel conducting plate transmission lines, but much improved performance can be obtained when one or both of the transmission lines comprise a transverse electromagnetic mode horn. The Brewster Angle concept applied herein requires a plane wave incident on a planar boundary with a magnetic component parallel to the planar boundary. It is apparent therefore that the wavefront must maintain characteristics approximating to planarity as it passes through the transmission means, so that the angular separation between upper and lower conductors of the horn and the apex angle must be sufficiently small to maintain approximate planarity of the wavefront. Within these constraints the radiated field strength from the antenna can be maximized by reducing impedance mismatch

between the aperture of the second horn, which serves to radiate the signal from the antenna, and the medium into which the signal is radiated (usually this will mean matching up with the impedance of air/free space). This must be done whilst retaining impedance matching at the dielectric interface, so the second horn is preferably  
5 profiled such that its impedance increases with distance from the interface towards an aperture so as to be substantially matched at the aperture to the impedance of the medium into which the horn radiates. In addition, the second horn may be resistively loaded in order to attenuate currents reflected from the antenna aperture, which currents can cause undesirable features in the radiated pulse.

10

The invention will now be described by way of example only with reference to figures 1 to 5 in which;

Figure 1 is a plan view of a ground plane antenna according to an  
15 embodiment of the invention;

Figure 2 is a longitudinal cross section of the antenna of figure 1;

Figure 3 is a longitudinal cross section of a modified ground plane  
20 antenna based on the embodiment of figures 1 and 2;

Figure 4 is a plan view of a free field antenna according to an alternative  
embodiment of the invention;

25 Figure 5 is a longitudinal cross section of the antenna of figure 4.

In figures 1 and 2 there is provided a ground plane antenna designed to operate at 50 ohm impedance. An electromagnetic pulse generator 1 is made up of a spark gap generator incorporating a pulser 3 and a spark gap 2, and a parallel plate

transmission line feed 4 which comprises a grounded plate 6 and parallel upper plate 8 having PMMA as a dielectric 10. For 50 ohm operation with a PMMA dielectric the transmission line feed 4 requires a width/height ratio ( $W3/H3$ ) of approximately 2.4. The feed enables the sharpened pulse signal output from the spark gap 2 to be passed  
5 to a PMMA filled TEM horn 12. The spark gap may alternatively be configured so that it lies across and shorts the plates 6 and 8 so that the rear of the applied pulse is sharpened rather than the front as would otherwise be the case. The spark gap medium may be solid, gaseous or liquid.

10 The horn 12 has a grounded plate 14 and an upper plate 16 maintained at an angle of elevation thereto  $\theta_1$  which is kept shallow to ensure that the wavefront maintains characteristics approximating to planarity which are necessary for the Brewster Angle principle to be applied. In this particular embodiment  $8.5^\circ$  has been found an optimum compromise for the angle  $\theta_1$  between the advantages which a horn  
15 antenna offers over a simple stripline and the need to maintain an approximately planar wavefront. The plates 14, 16 are configured to produce a horn with an apex angle  $\theta_2$  of  $19.5^\circ$ .

The second transmission line, from which the signal is radiated away from the  
20 antenna, is an air filled TEM horn 18 comprising a ground plate 20 and upper plate 22 configured to give a virtual apex angle  $\theta_3$  of  $40^\circ$ . The upper plate 22 is maintained at an angle of elevation of  $8.5^\circ$  relative to the grounded plate 20.

Between the air filled horn 18 and the PMMA filled horn 12 there is provided  
25 a transition element 24. The transition element 24 has an upper plate 25 with the grounded plate 20 serving as its lower plate, partly containing a PMMA dielectric which is continuous with the PMMA dielectric in the horn 12 and parallel plate line feed 4, and also containing air 28 which is continuous with the air in the horn 18. The interface between the two media 30 is shaped to ensure the wavefront is incident at the



Brewster Angle for a PMMA air transition, which requires angles  $\Psi_1$  and  $\Psi_2$  to be  $31.3^\circ$  and  $58.7^\circ$  respectively. The heights  $H_2$ ,  $H_1$ , and hence the other dimensions of the antenna, are governed by the need to avoid breakdown of the signal and hence are determined by the operating voltage. For 30kV operation  $H_2=58\text{mm}$  and  $H_1=35\text{mm}$  are found acceptable, and this enables the length of the PMMA horn to be kept reasonably short (30cm with this geometry) so that dispersion of the signal is kept sufficiently low to allow operation with pulse risetimes of the order of 120ps. For higher voltage operation  $H_2$  and  $H_1$  may be increased, but the corresponding increase in length of the PMMA filled horn will increase the minimum usable pulse risetime, and it may therefore be preferable to consider other modifications, such as a sulphur hexafluoride jacket in the transition region.

For ease of manufacture the conducting plates 6, 8, 14, 16, 20, 22 and 25 are constructed from aluminium, but alternatives will readily suggest themselves as appropriate to those skilled in the art.

Figure 3 illustrates a modification of the antenna of figures 1 and 2, and like numerals are used to designate like components where appropriate. In this embodiment there is provided a stripline feed 4, PMMA filled horn 12, and transition element 24 of equivalent design to the above. However, this embodiment sharpens the signal by means of a ferrite sharpening line 27. A signal from a pulser (not shown) is passed to a coaxial line comprising a pair of coaxial conductors 29 with a length of ferrite material 32 included in the core to effect sharpening. The sharpened signal passes via a coaxial/stripline converter 33 to the stripline 4, and thence to the first TEM horn 12 as in the earlier embodiment. A spark gap may also be configured as coaxial, in which case a similar coaxial to stripline converter 33 is required.

As the antennae in these embodiments are designed for 50 ohm operation there is appreciable impedance mismatch with free space when the signal reaches the air

filled horn aperture of the earlier embodiment. To mitigate this, the embodiment illustrated in figure 3 includes an alternative air filled horn 19, having an upper plate 23 which is no longer planar but is instead divergently curved away from the ground plate 21 so that the height to width ratio, and hence the impedance, increases between dielectric interface 30 and aperture 31. The impedance at the aperture thereby more nearly coincides with that of free space allowing radiated field strength to be maximized.

In addition, undesirable reflections from a mis-matched antenna aperture may be reduced by applying a resistive loading across the ground plate 20 and upper plate 22 in order to provide a continuously increasing resistive profile between the dielectric interface 30 and aperture 31. This can be achieved by applying a resistive coating or chip resistors to one or both of the plates to approximate such a load or a resistive termination to ground could be applied to the ends of the antenna. For example, two 100 ohm resistors 39 connected in parallel between the ground plate 20 and the upper plate 22 at their aperture ends would match 50 ohm assumed impedance of the antenna.

In figures 4 and 5 there is provided a free field antenna configured according to similar principles to the ground plane antenna in figures 1 and 2.

A pulse generator 35 is provided in which pulse sharpening is effected by means of a spark gap 37. A parallel plate transmission line feed 34 which comprises parallel conducting plates 36 containing a PMMA dielectric 38 is used to transmit the fast risetime short duration pulse to a PMMA filled TEM horn 40. The horn 40 has a pair of aluminium plates 42 configured to have an angular separation of  $8^\circ$  (that is, the angles  $\theta_2$  are  $4^\circ$ ) and the plates are flared at an angle of  $12.75^\circ$  to produce an apex angle  $\theta_5$  of  $25.5^\circ$ . These are again chosen to ensure that the wavefront maintains characteristics approximating to planarity. The second transmission means again

comprises an air filled TEM horn 44 made up of a pair of aluminium plates 46, 47 configured to the same  $8^\circ$  angular separation and flared at  $23^\circ$  to produce a virtual apex angle  $\theta_6$  of  $46^\circ$ .

- 5           The transition element 48 consists of an upper aluminium plate 50 which lies in a plane parallel to that of the transmission line 34 and a lower aluminium plate 52. The PMMA dielectric in the transition zone 54 is shaped to ensure an angle of incidence at the interface 56 with air corresponding to the Brewster angle, so that  $\Psi_3$  is  $58.7^\circ$  and the lower plate 52 is at an angle  $\Psi_4$  to the interface 56 of  $31.3^\circ$ . The
- 10   height to width cross-sectional ratio of the upper antenna arm 46 must be approximately equal to that of a notional 50 ohm air filled stripline to minimize any mismatch. This requires a slight flaring of the upper plate 50 in the transition element over and above the  $12.75^\circ$  flaring of the plates 42. Similar considerations lead to a flaring angle for the lower plate 52 in the transition element which is less than  $12.75^\circ$ .
- 15   The angles involved do not create major discontinuities within this region, so any mismatch will be small, of the order of 10% or less.

Individual antenna elements may be assembled as an array in order to increase the radiated power.

CLAIMS

1. An antenna comprising an electromagnetic pulse generator, a first transverse electromagnetic mode transmission line containing a first dielectric medium, and a second transverse electromagnetic mode transmission line containing a second dielectric medium, serially connected so as to enable transmission of a signal from the generator to the second transmission line, wherein the first transmission line incorporates a transition element providing an interface between the first and second dielectric media which is so configured that a signal from the generator is incident on the interface at an angle substantially equal to the Brewster Angle.
2. Antenna according to claim 1 wherein the second dielectric medium is air.
3. Antenna according to claim 1 wherein the second dielectric medium is a gaseous dielectric with a higher breakdown potential than air.
4. Antenna according to any preceding claim wherein the first dielectric medium is selected from the group comprising polymethylmethacrylate, polystyrene, and polytetrafluoroethylene.
5. Antenna according to any preceding claim wherein the electromagnetic pulse generator is capable of generating a pulse at a voltage greater than 30kV.
6. Antenna according to claim 5 wherein the electromagnetic pulse generator is capable of generating a pulse at a voltage greater than 60kV.

7. Antenna according to claim 6 wherein the electromagnetic pulse generator is capable of generating a pulse at a voltage greater than 100kV.
8. Antenna according to any preceding claim wherein the electromagnetic pulse generator is capable of generating a pulse having a risetime of less than 200ps.
9. Antenna according to claim 8 wherein the electromagnetic pulse generator is capable of generating a pulse having a risetime of less than 120ps.
10. Antenna according to any preceding claim wherein the electromagnetic pulse generator includes signal sharpening means.
11. Antenna according to claim 10 wherein the signal sharpening means comprises a spark gap.
12. Antenna according to claim 10 wherein the signal sharpening means comprises ferrite sharpening lines.
13. Antenna according to any preceding claim wherein the first transmission line comprises a first transverse electromagnetic mode horn.
14. Antenna according to any preceding claim wherein the second transmission line comprises a second transverse electromagnetic mode horn.
15. Antenna according to claim 14 wherein the second horn is profiled such that its impedance increases with distance from the interface towards an aperture so as to be substantially matched at the aperture to the impedance of the medium into which the horn radiates.

16. Antenna according to claim 14 wherein the second horn is resistively loaded such that its resistive profile increases with distance from the interface towards an aperture so as to be substantially matched at the aperture to the impedance of the medium into which the horn radiates.
17. Antenna substantially as hereinbefore described with particular reference to the accompanying drawings.

1/3

Fig.1.


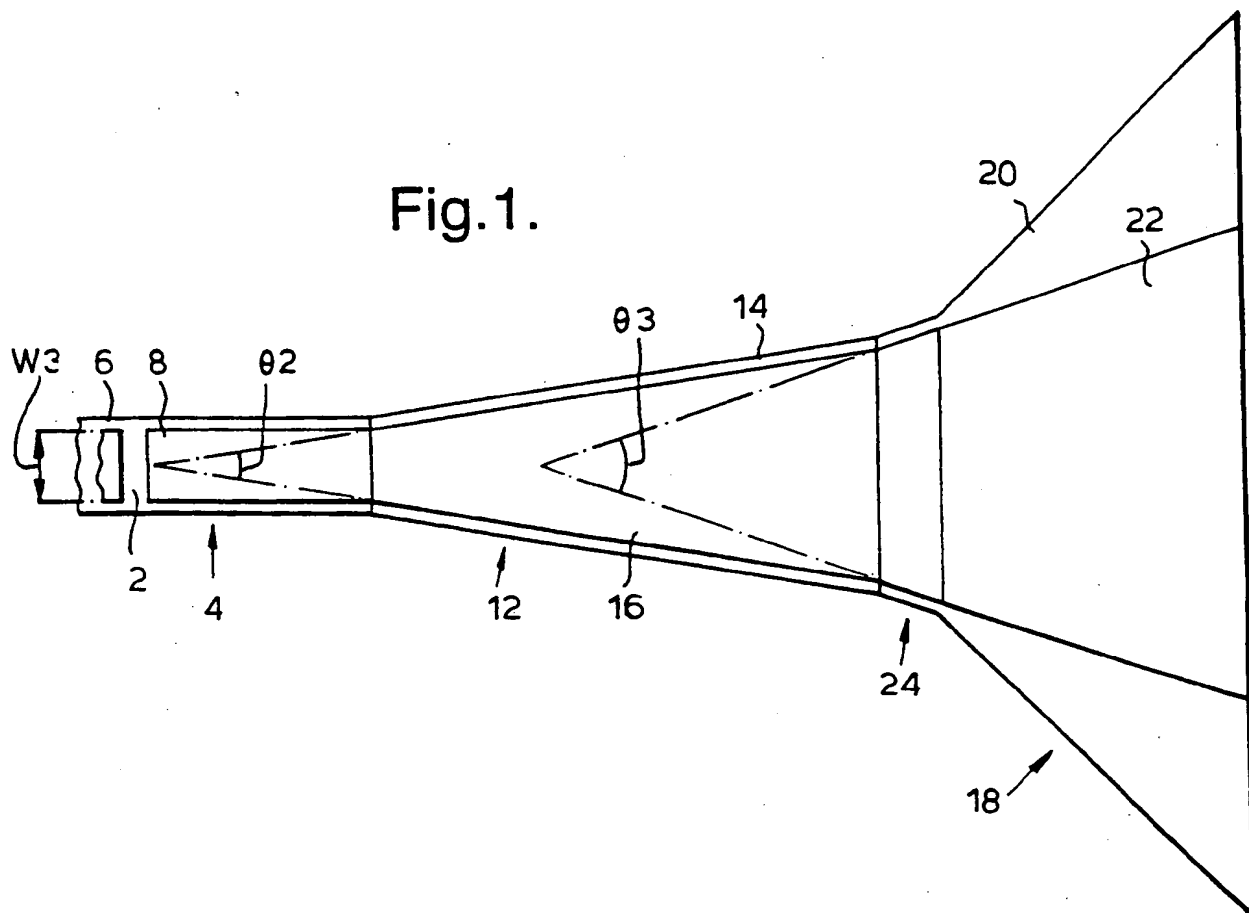


Fig.2.

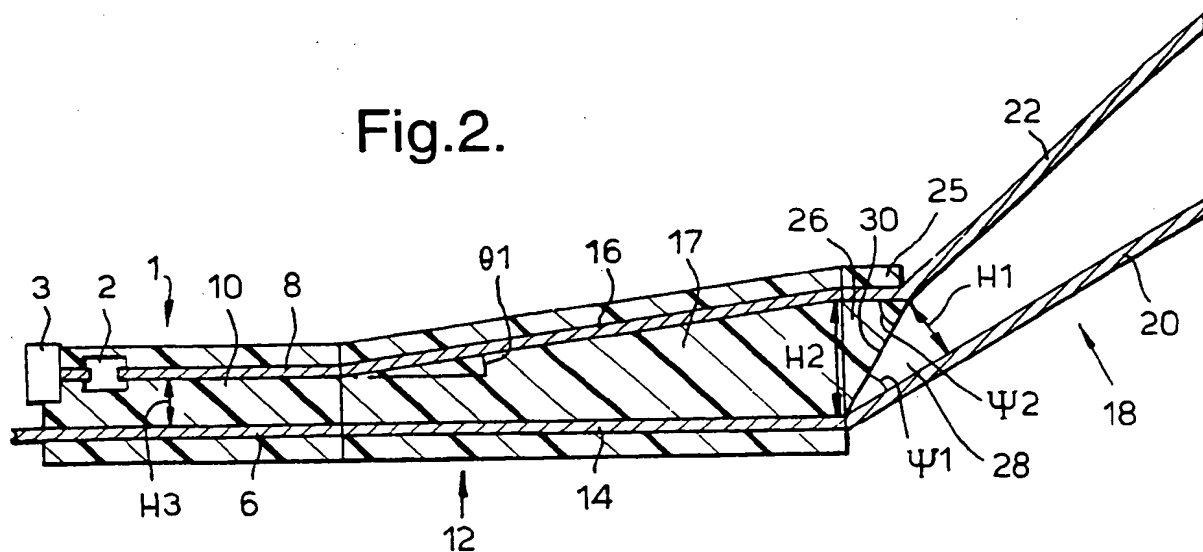

2/3

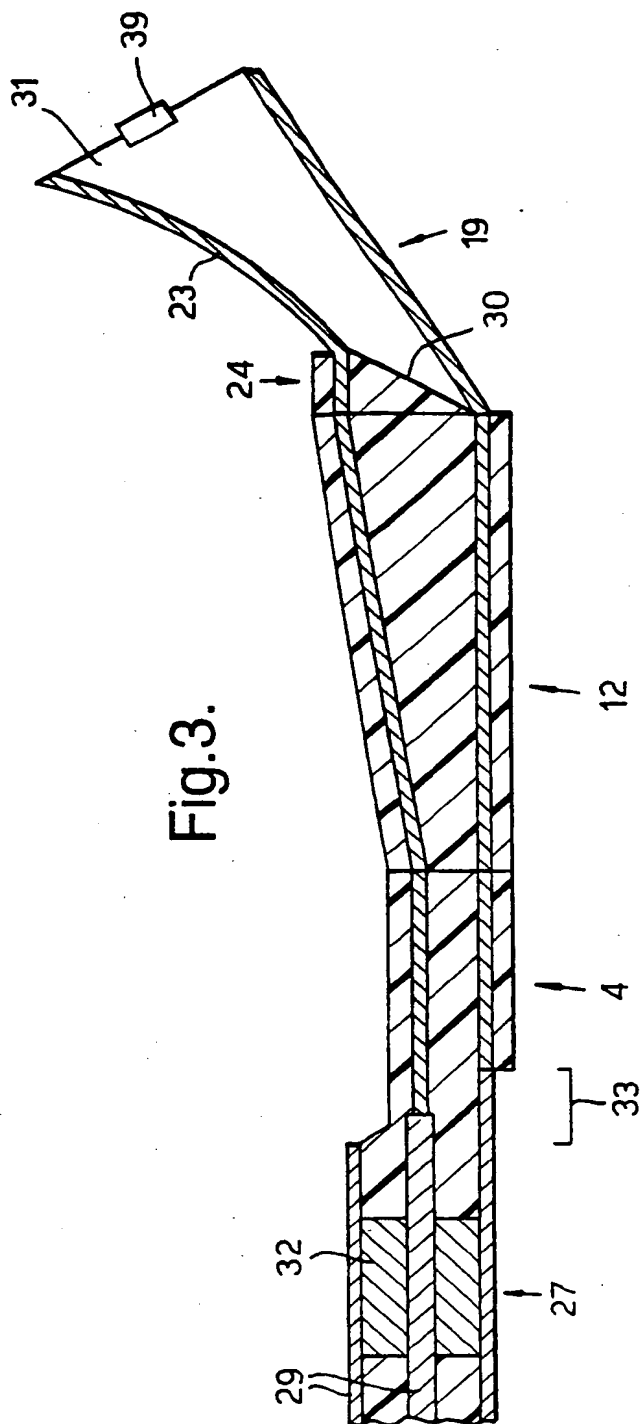


Fig.3.



3/3

Fig.4.


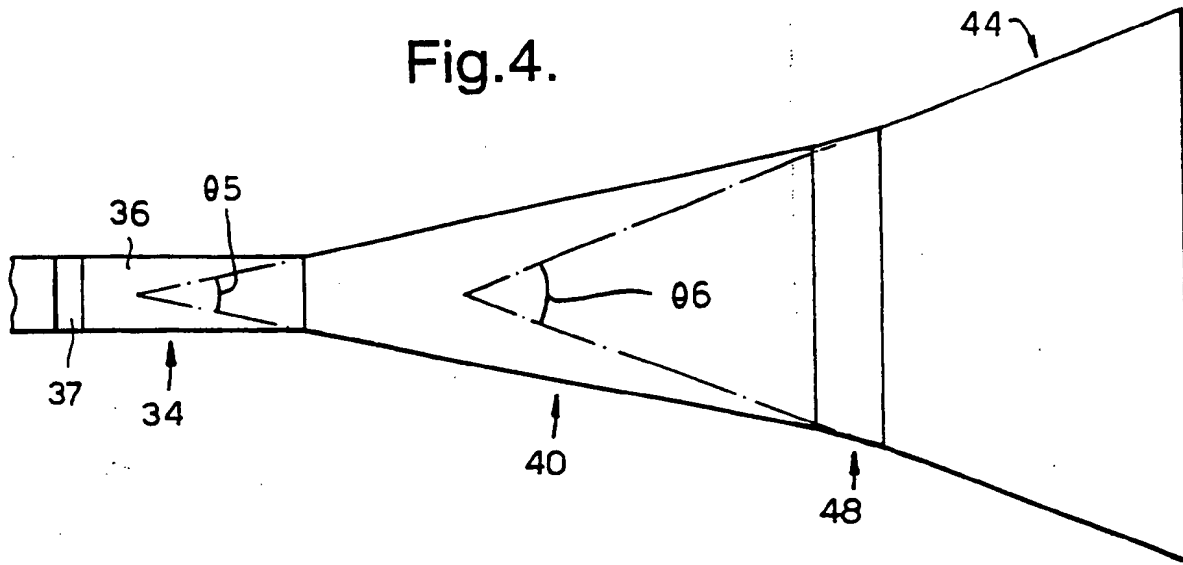


Fig.5.

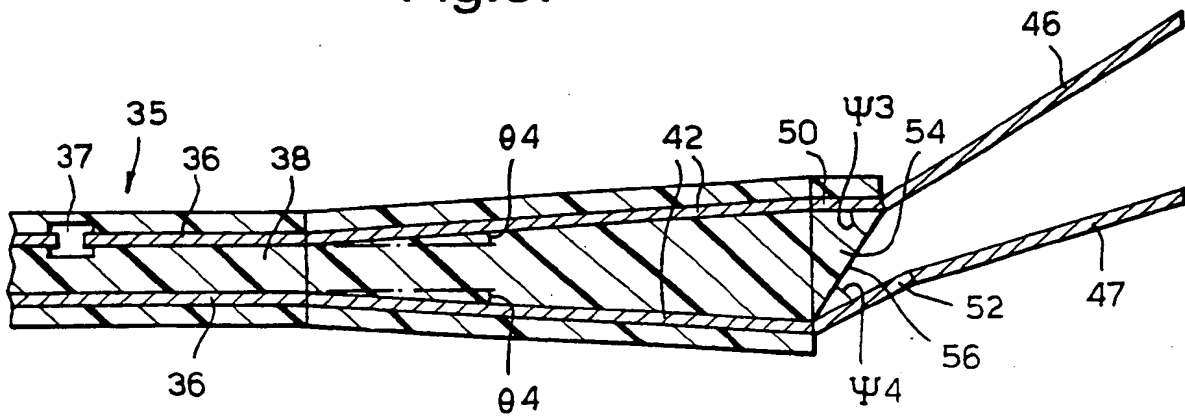

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 95/01127

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H01Q13/20 H01Q19/08 H01Q13/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01Q H01P G01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB,A,598 493 (HAZELTINE) 18 March 1948 see page 8, line 45 - page 9, line 15; figures 6B,7A,B ---	1-3
A	MEASUREMENT TECHNIQUES, vol. 37, no. 2, February 1994 NEW YORK US, pages 199-204, XP 000468274 AL BETKOV ET AL. 'EXPERIMENTS ON MEASUREMENT TRANSDUCERS USING A TEM HORN' see page 199 - page 203; figure 1 ---	1
A	US,A,3 659 203 (ROSS ET AL.) 25 April 1972 see claims 1-1-13; figures 1-14 --- -/--	1,4-10

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* & \* document member of the same patent family

Date of the actual completion of the international search

13 July 1995

Date of mailing of the international search report

3 1. 07. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Angrabeit, F

# INTERNATIONAL SEARCH REPORT

Inter. nal Application No

PCT/GB 95/01127

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP,A,0 465 845 (ASEA BROWN BOVERI) 15  January 1992  see column 2, line 19 - column 3, line 42;  figures 1-3</p> <p>-----</p>	1

**INTERNATIONAL SEARCH REPORT**  
information on patent family members

International Application No  
**PCT/GB 95/01127**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-598493		FR-A- 951301	29-10-49
		US-A- 2508479	23-05-50
		US-A- 2511610	13-06-50
-----			
US-A-3659203	25-04-72	DE-A- 2129700	16-12-71
		FR-A, B 2095256	11-02-72
		GB-A- 1293737	25-10-72
-----			
EP-A-0465845	15-01-92	JP-A- 4252601	08-09-92
-----			